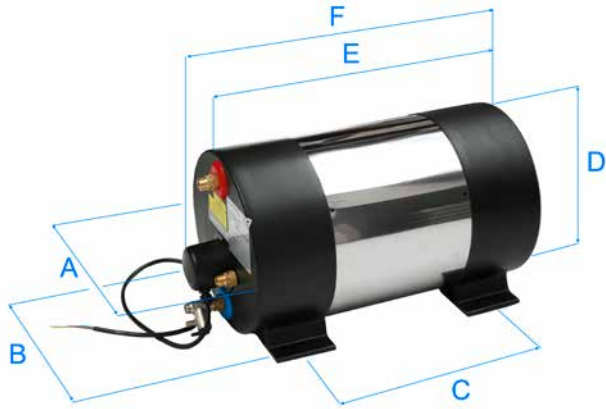


AquaH - DIMENSIONS

Part No.	Electrical supply	Storage capacity	Weight empty	A	B	C	D	E	F
	w	lt (gallons)	kg (lbs)	mm	mm	mm	mm	mm	mm
56-47455-01	1200	22 (5.81)	10 (22)	322 (12.7")	290 (11.4")	235 (9.25")	325 (12.8")	410 (16.1")	485 (19.1")
56-47455-03	500								
56-47456-01	1200	30 (7.93)	11,5 (25.4)	322 (12.7")	290 (11.4")	370 (14.6")	325 (12.8")	545 (21.5")	620 (24.4")
56-47456-03	500								
56-47457-01	1200	45 (11.9)	15 (33.1)	322 (12.7")	290 (11.4")	625 (24.6")	325 (12.8")	805 (31.7")	880 (34.6")
56-47457-03	500								
56-47458-01	1200	60 (15.9)	17,3 (38.1)	322 (12.7")	290 (11.4")	810 (31.9")	325 (12.8")	990 (39")	1065 (41.9")
56-47458-03	500								
56-47459-01	1200	80 (21.1)	20 (44.1)	322 (12.7")	290 (11.4")	1090 (42.9")	325 (12.8")	1270 (50")	1345 (53")
56-47459-03	500								

Electric supply 220-240 V ~ 50 Hz

Water connections 1/2"

AquaH - HEATING TIME**1200W**

Part No.	Electrical supply w	Storage capacity lt (gallons)	Water temperature in °C (°F)							
			20 (68)	25 (77)	30 (86)	35 (95)	40 (104)	45 (113)	50 (122)	55 (131)
56-47455-01	1200	22 (5.81)	6	12	19	25	31	38	44	51
56-47456-01	1200	30 (7.93)	8	17	26	34	43	52	61	69
56-47457-01	1200	45 (11.9)	13	26	39	52	65	78	91	104
56-47458-01	1200	60 (15.9)	17	34	52	69	87	104	122	139
56-47459-01	1200	80 (21.1)	23	46	69	93	116	139	162	186

Initial temperature 15°C

Table shows time in minutes

500W

Part No.	Electrical supply w	Storage capacity lt (gallons)	Water temperature in °C (°F)							
			20 (68)	25 (77)	30 (86)	35 (95)	40 (104)	45 (113)	50 (122)	55 (131)
56-47455-03	500	22 (5.81)	15	30	46	61	76	92	107	122
56-47456-03	500	30 (7.93)	20	41	62	83	104	125	146	167
56-47457-03	500	45 (11.9)	31	62	94	125	156	188	219	251
56-47458-03	500	60 (15.9)	41	83	125	167	209	251	293	334
56-47459-03	500	80 (21.1)	55	111	167	223	279	334	390	446

Initial temperature 15°C

Table shows time in minutes